

Lantech.com

Q - 300XT



Simple Automation™
Stretch Wrapping System



Productivity

Automation in a
Semi-automatic
stretch wrapping
environment.

Create Your Own System

Configure and
price a stretch
wrapper at
www.lantech.com.

S-300



Simple Automation


Consistent performance insured with fully-guarded film cut/clamp module where loading and unloading vary from one load to the other, and from one operator to another.

Gocon Figure

Q-300XT

Eliminate the "run-around" with Simple Automation™ in a fast-paced environment.

Q-300XT automatically attaches and cuts the film. No timer adjustments. No "tweaking" required for peak performance. Forktruck operator will spend more productive time behind the wheel.

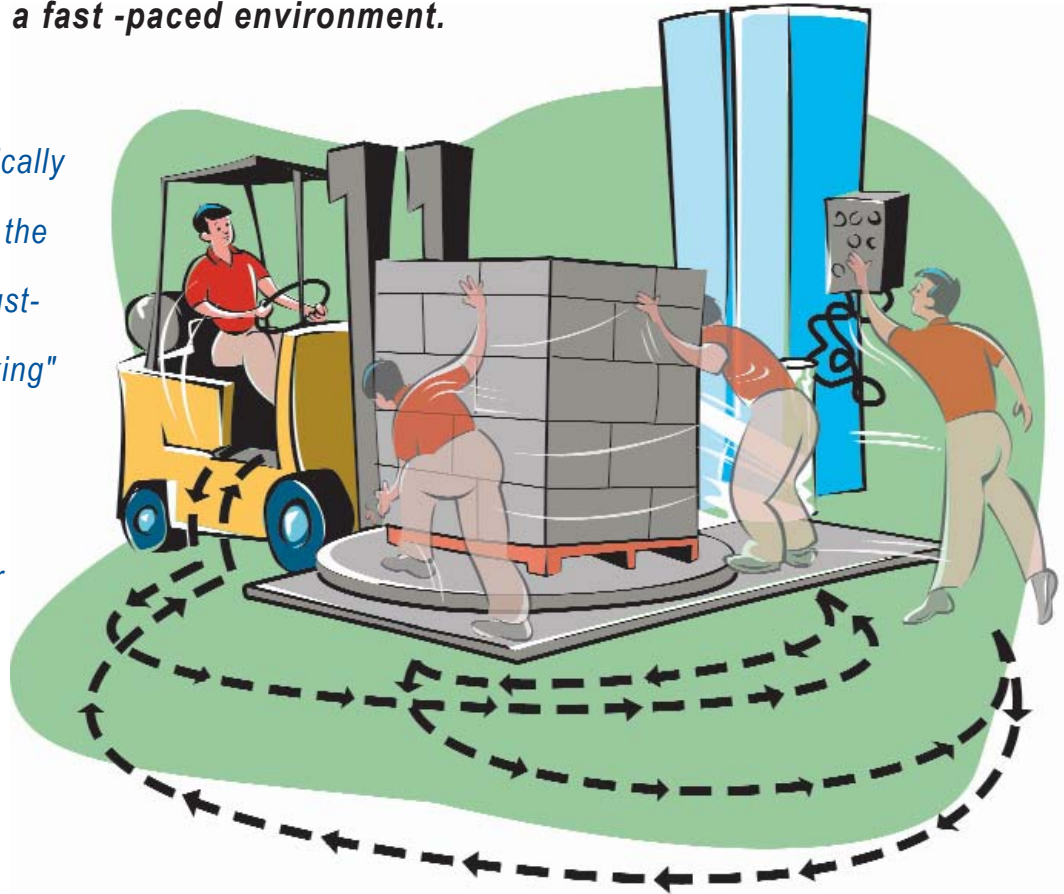

Q-300XT Specifications

PERFORMANCE CRITERIA

■ Production Speed based on 80" load height; 2 film layers and 12 revolutions	30-40 loads per hour
■ Maximum Load Diagonal	72"
■ Minimum Load Height	80**
■ Maximum Load Weight	4000 lbs.

LOAD HANDLING SYSTEM

■ Turntable Drive	3/4 HP TEFC Motor
■ Turntable Speed	1-12 RPM

FILM DELIVERY SYSTEM

■ Power-Roller Stretch® System	200% Standard
■ Wrapping Force	Variable Control
■ Film Capacity	10" Roll Diameter, 20" Film Web Width

MACHINE SHIPPING WEIGHT

■ Shipping Weight (including skid - approximate)	1650 lbs. (excludes ramp)
--	---------------------------

ELECTRICAL REQUIREMENTS

■ Machine Voltage	115V, 20 Amp
■ Microcontroller	Standard

SERVICE SUPPORT

24 hrs/7 days a week

* Maximum wrap height may vary based on film force, neckdown, and roll carriage travel speed. Specifications subject to change without notice.

Specifications subject to change without notice. Lantech systems and sub-systems are protected by U.S. and foreign patents. Additional U.S. and foreign patents pending. © Lantech 2002

